

# HTC

## The CA Series

### For normal to soft floors



### The new, improved CA Series. Faster in the beginning and lasts longer in the long run!

The CA Series is a complete line of floor grinding tools for use on normal to soft concrete, natural stone and terrazzo. The course segments in the CA series are ideal for removing a variety of floor coatings such as epoxy paints, adhesives, self-leveling compounds and more...

- 15% better cutting capacity
- Up to 20% longer life
- EZchange™ and innovative EZstart
- Perfect for floor preparation
- This series of tools is one of the most used in the market
- Improved metal bond



#### **EZstart – only from HTC!**

The grooved surface makes it easier for the tool to open and achieve maximum cutting capacity from the start. The grinding operation becomes more effective and delivers better results in less time.















HTC proves, once again, that we never stop perfecting our innovations!



# The CA Series Guide



A complete series of tools for floor preparation and grinding of normal to soft concrete, natural stone and terrazzo.


SS	DS	Name	Item no.	Description
		<b>CA 0 Lilac</b>	211773 (SS) 211772 (DS)	A coarse segment for grinding concrete and removing a variety of floor coatings. Works well on soft substrates.
		<b>CA 1<sup>®</sup> Silver</b>	211778 (SS) 211777 (DS)	A standard segment for concrete, rain-damaged surfaces and newly-laid concrete floors. This segment leaves a very rough coarse texture. CA 1 <sup>®</sup> has a high stripping rate in relation to its life.
		<b>CA 2 Gold</b>	211783 (SS) 211782 (DS)	An all around versatile segment for concrete, natural stone and terrazzo. The tool has a long life and excellent removal efficiency.
		<b>CA 3 Grey</b>	211787 (SS) 211786 (DS)	A slightly finer concrete segment that also works well for paint removal. Can sometimes be used as step 1 on normal concrete.
		<b>CA 4 Brown</b>	211792 (SS) 211791 (DS)	Use this after the previous step for high removal efficiency. Produces an almost score-free surface.
		<b>CA 5 Black</b>	211796 (SS) 211795 (DS)	Produces a slightly finer finish than the previous grinding step. Used on concrete, natural stone and terrazzo.
		<b>CA 6 Blue</b>	211800 (SS) 211799 (DS)	CA 6 is used for wet grinding natural stone and terrazzo.

SS = single segment. DS = double segment



### Ultra-fast change of diamond tools!

Fit the wing of the tool into the slot on the holder. There is only one position where it will fit. Gently tap the tool firmly into place with a rubber hammer. You are now ready to start!

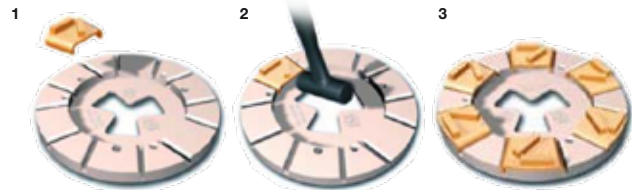

Recommended metal tools for floors	Soft	Normal	Hard	Extremely hard
C Series	X			
CA Series	X	X		
SF Series		X	X	
CS Series			X	X

### HTC Sweden AB

Postal address: Box 69, 614 22 Söderköping, Sweden  
 Visitors/delivery address: Klevvägen 7  
 614 92 Söderköping, Sweden  
 Phone: +46 (0)121-294 00. Fax: +46 (0)121-152 12  
 E-mail: info@htc-sweden.com

